


# DSE3

## DIRECTIONAL VALVE WITH PROPORTIONAL CONTROL SERIES 11


**SUBPLATE MOUNTING  
ISO 4401-03 (CETOP 03)**

**p max 350 bar**  
**Q max 40 l/min**

### MOUNTING INTERFACE

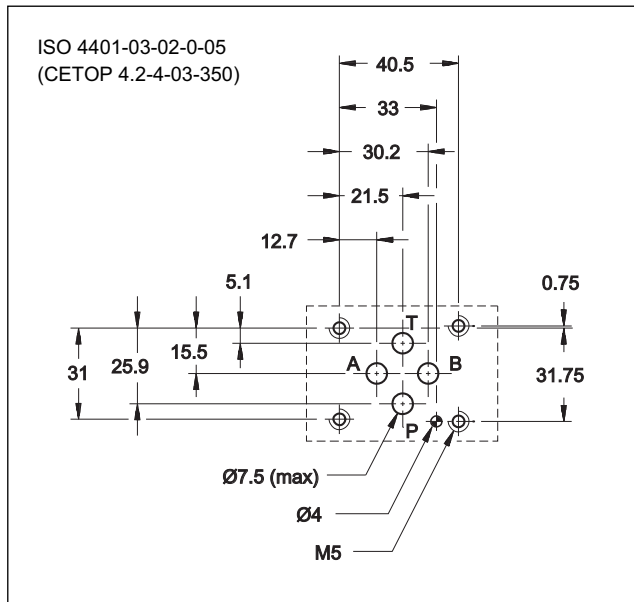

### OPERATING PRINCIPLE

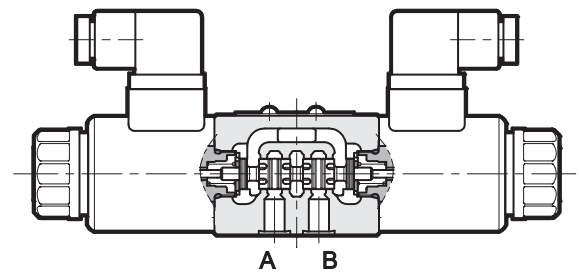


- The DSE3 valve is a directly operated directional control valve with electric proportional control and with ports, in compliance with ISO 4401 standards (CETOP RP 121H).
- It is used for directional and speed control of hydraulic actuators.
- Valve opening and hence flow rate can be modulated continuously in proportion to the current supplied to the solenoid.
- The valve can be controlled directly by a current control supply unit or by means of the relative electronic control units to exploit valve performance to the full (see paragraph 10).

— Also available with manual lever override.

**PERFORMANCES** (obtained with mineral oil with viscosity of 36 cSt at 50°C and with the relative electronic control units)

Max operating pressure: P - A - B ports	bar	350
T port		210
Maximum flow with $\Delta p$ 10 bar P-T	l/min	1,3 - 4 - 8 - 16 - 26
Step response		see chapter 6
Hysteresis (with PWM 200 Hz)	% Q <sub>max</sub>	< 6%
Repeatability	% Q <sub>max</sub>	< ± 1,5%
Electrical characteristics		see chapter 5
Ambient temperature range	°C	-20 / +50
Fluid temperature range	°C	-20 / +80
Fluid viscosity range	cSt	10 + 400
Fluid contamination degree	According to ISO 4406:1999 class 18/16/13	
Recommended viscosity	cSt	25
Mass: single solenoid valve	kg	1,6
double solenoid valve		2,0

### HYDRAULIC SYMBOLS (typical)

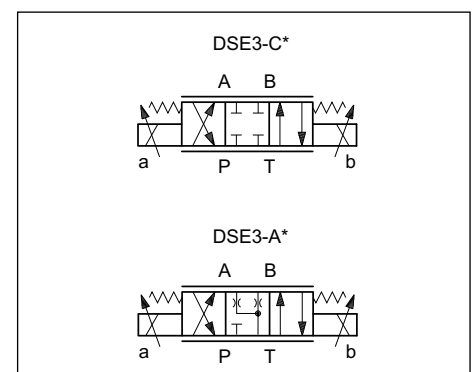

## 1 - IDENTIFICATION CODE

<b>D</b>	<b>S</b>	<b>E</b>	<b>3</b>	<b>-</b>					<b>/ 11</b>	<b>-</b>				<b>/</b>	
----------	----------	----------	----------	----------	--	--	--	--	-------------	----------	--	--	--	----------	--

Directly operated directional control valve

Electric proportional control

Size ISO 4401-03 (CETOP 03)

Spool type:  
**C** = closed centers  
**A** = open centers

Spool nominal flow (see table 2)

Solenoid position (omit for configuration with two solenoids):  
**SA** = 1 solenoid on side A  
**SB** = 1 solenoid on side B

**NOTE:** The valve is supplied with standard surface treatment of phosphatising black. On request we can supply these valves with other surface finishes.  
Add suffix **/W\*** at the end of the code.

**W4** = carbonitriding with oxidation process.black colour  
**W5** = semi-gloss epoxy painting black RAL 9005 thickness 80 ÷ 100µ  
**W6** = gloss polyurethane painting black RAL 9005 thickness 140µ

Manual override (see par. 10)

Coil electrical connection: (see paragraph 8)  
**K1** = plug for connector type DIN 43650 (**standard**)  
**K7** = plug for connector type DEUTSCH DT04-2P male  
**K12** = plug for M12 connector K1 coils and DUAL DIN 43560 connector delivered together

**D12** = Nominal solenoid voltage 12V DC  
**D24** = Nominal solenoid voltage 24V DC

Seals:  
**N** = NBR seals for mineral oil (**standard**)  
**V** = FPM seals for special fluids

Series No.  
(from 10 to 19 sizes and mounting dimensions remain unchanged)

## 2 - CONFIGURATIONS

Valve configuration depends on the combination of the following elements:  
number of proportional solenoids, spool type, nominal flow rate.

2 solenoids configuration:  
3 positions with spring centering

**"SA"** configuration: 1 solenoid on side A.  
2 positions (central + external) with spring centering


**"SB"** configuration: 1 solenoid on side B.  
2 positions (central + external) with spring centering

*	Controlled flow with Δp10 bar P-T
<b>01</b>	1,3 l/min ( <b>NOTE</b> )
<b>04</b>	4 l/min
<b>08</b>	8 l/min
<b>16</b>	16 l/min
<b>16/08</b>	16 (P-A) / 08 (B-T) l/min
<b>26</b>	26 l/min
<b>26/13</b>	26 (P-A) / 13 (B-T) l/min



**NOTE:** the 01 spool is available in version **C** (closed center) only.

### 3 - CHARACTERISTIC CURVES (values measured with viscosity of 36 cSt at 50°C with valves connected to the relative electronic control units)



Typical constant flow rate control curves at  $\Delta p$  according to current supply to solenoid (D24 version, maximum current 860 mA), measured for the various spool types available. The reference  $\Delta p$  values are measured between ports P and T on the valve.





#### SPOOL TYPE C01

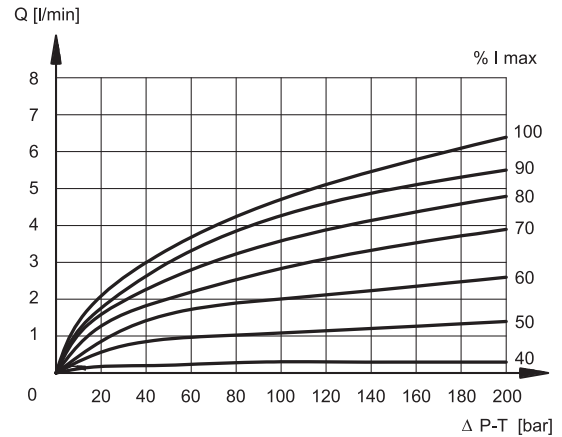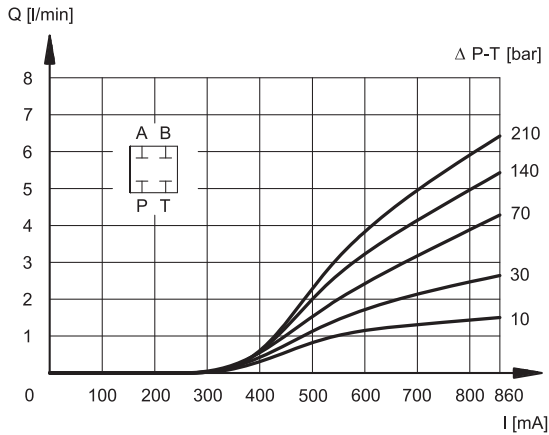

#### SPOOL TYPE C04

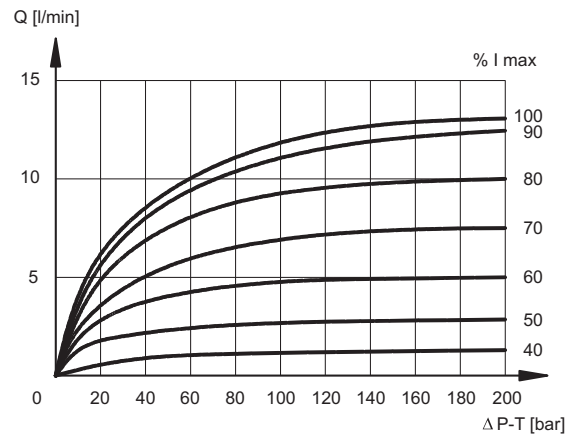
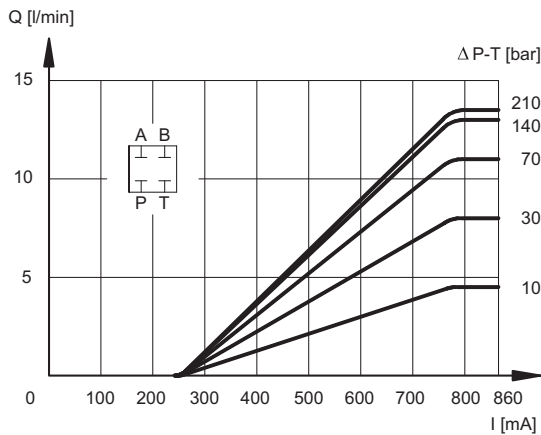


#### SPOOL TYPE C08

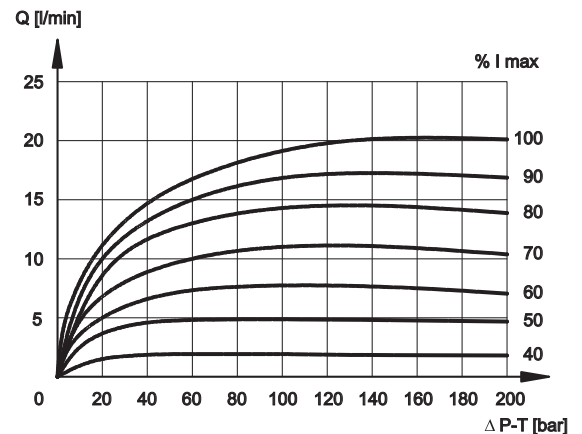
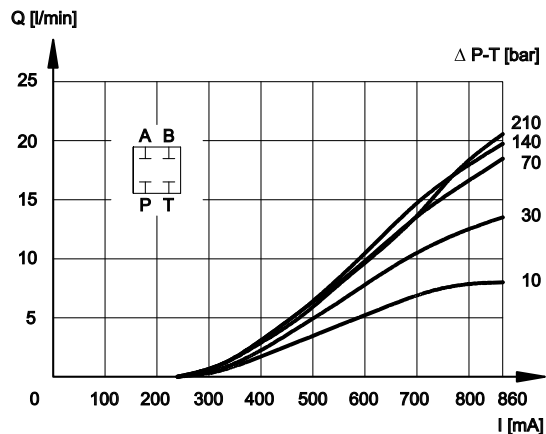






### SPOOL TYPE C16

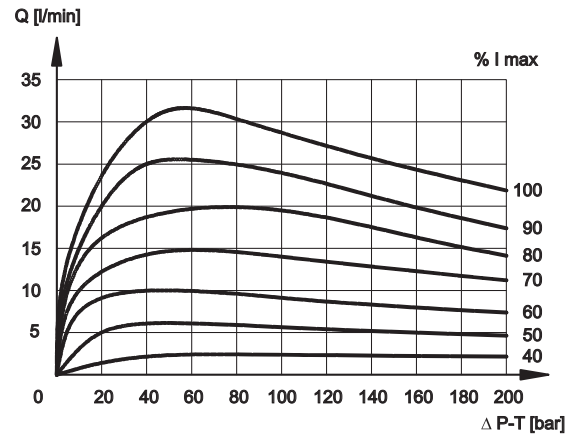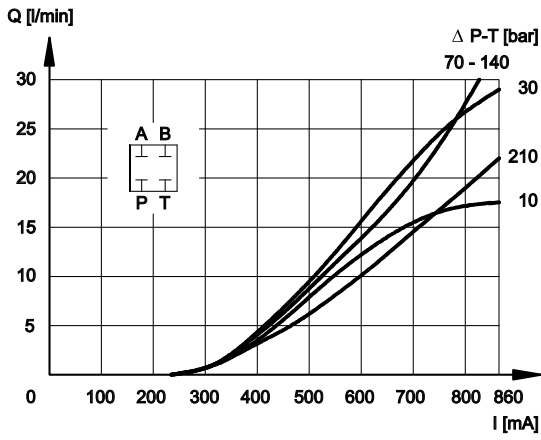



### SPOOL TYPE C26

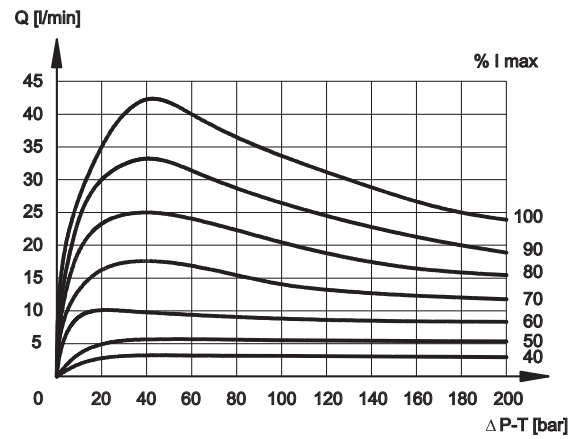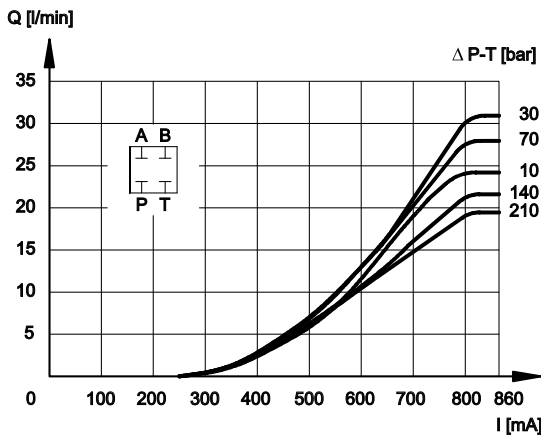



### SPOOL TYPE A04

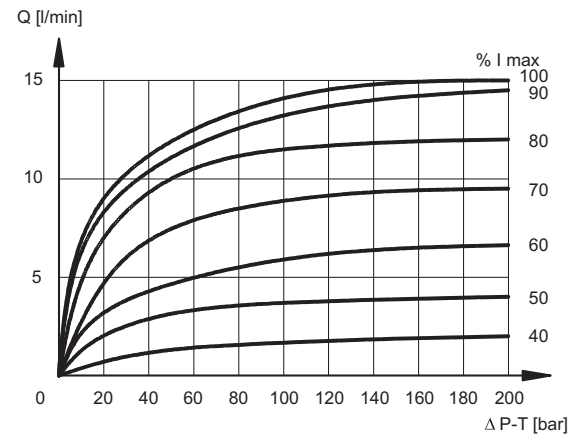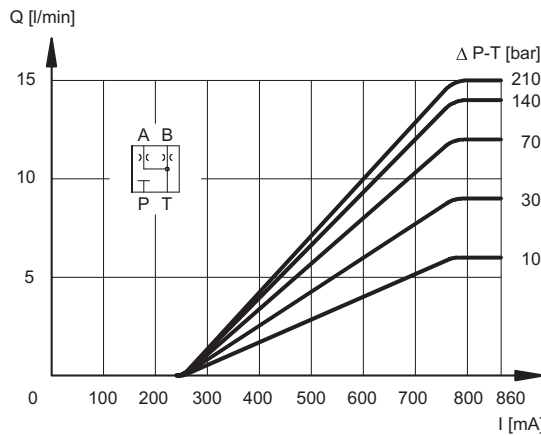



### SPOOL TYPE A08

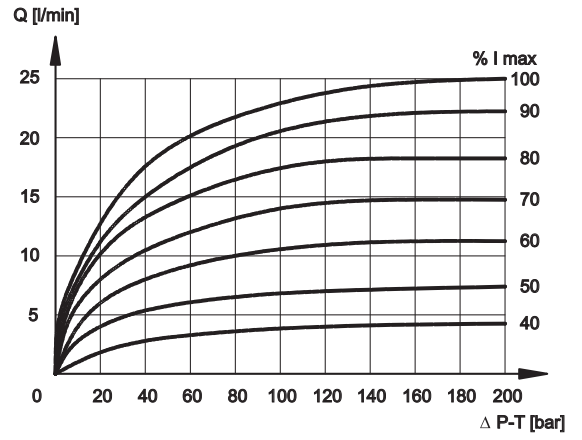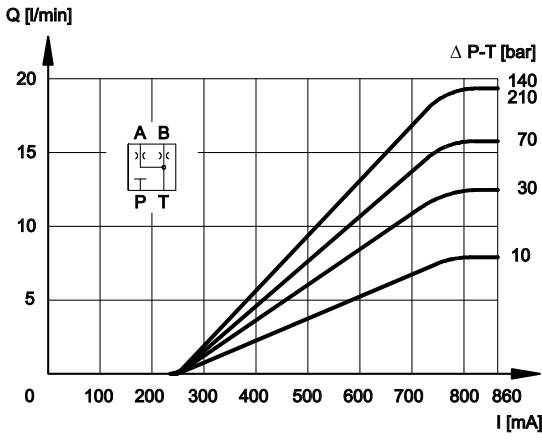

### SPOOL TYPE A16

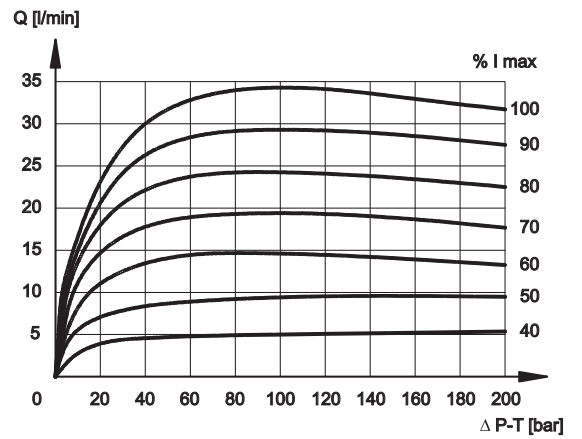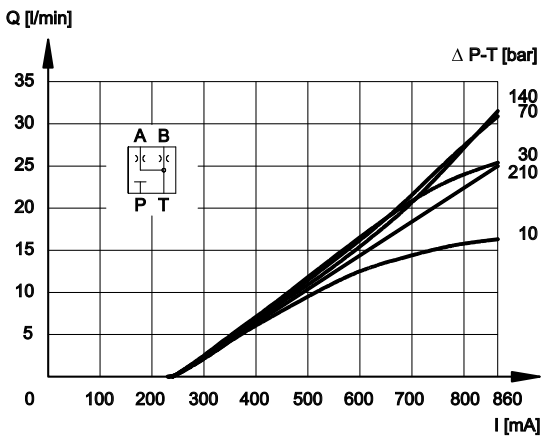

### SPOOL TYPE A26

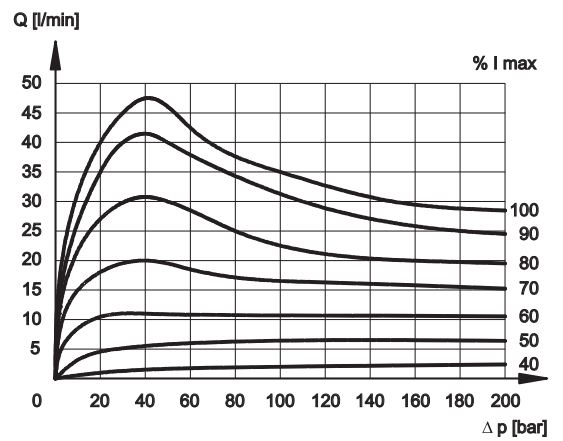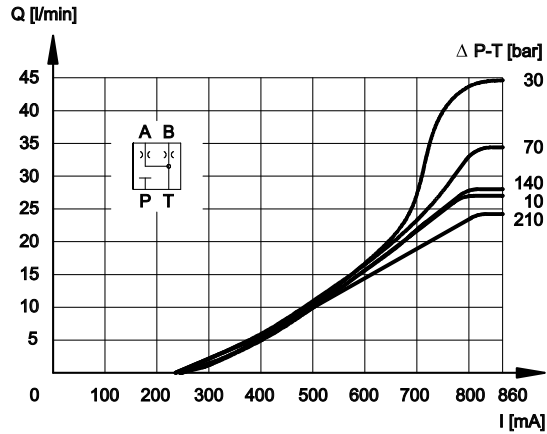

### 4 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids like HL or HM type, according to ISO 6743-4. With this kind of fluids, use NBR seals type (code N). For HFDR fluids type (phosphate esters) use FPM seals (code V). For use with other kind of fluids such as HFA, HFB, HFC please consult our technical department.

Operation with fluid temperature exceeding 80°C causes premature deterioration of the quality of the fluid and seals. The physical and chemical properties of the fluid must be maintained.

### 5 - ELECTRICAL CHARACTERISTICS

#### Proportional solenoid

The proportional solenoid comprises two parts: tube and coil.

The tube, screwed to the valve body, contains the armature which is designed to maintain friction to a minimum thereby reducing hysteresis.

The coil is mounted on the tube secured by means of a lock nut.

It can be rotated through 360° depending on installation clearances.

<b>NOMINAL VOLTAGE</b>	VDC	<b>12</b>	<b>24</b>
<b>RESISTANCE ( at 20°C)</b>	Ω	3,66	17,6
<b>MAXIMUM CURRENT</b>	A	1,88	0,86
<b>DUTY CYCLE</b>	100%		
<b>ELECTROMAGNETIC COMPATIBILITY (EMC)</b>	according to 2004/108/CE		
<b>CLASS OF PROTECTION:</b> atmospheric agents (CEI EN 60529) coil insulation (VDE 0580) Impregnation	IP 65 class H class F		

### 6 - STEP RESPONSE

(measured with mineral oil with viscosity of 36 cSt at 50°C with the relative electronic control units)

Step response is the time taken for the valve to reach 90% of the settled positioning value, following a step change of reference signal. The table shows typical response times tested with spool type C16 and Δp = 30 bar P-T.


<b>Reference signal step</b>	0 → 100%	100 → 0%
Step response [ms]		
<b>DSE3-A*</b>	50	40
<b>DSE3-C*</b>	50	40

### 7 - INSTALLATION

DSE3 valves can be installed in any position without impairing correct operation.

Ensure that there is no air in the hydraulic circuit.


Valves are fixed by means of screws or tie rods on a flat surface with planarity and roughness equal to or better than those indicated in the relative symbols. If minimum values are not observed fluid can easily leak between the valve and support surface.

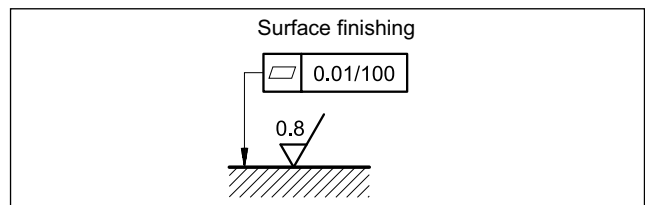


### 8 - ELECTRICAL CONNECTIONS

The valve are supplied with connection K1. The K12 version instead is delivered with connector DUAL DIN 43650 with M12 connection. The coil used is K1 type. The DUAL DIN connector allows to energize two solenoids with a single cable with socket M12.

For coils with standard electrical connections K1 type (DIN 43650) the connectors can be ordered separately. For the identification of the connector type to be ordered please see cat. 49 000.



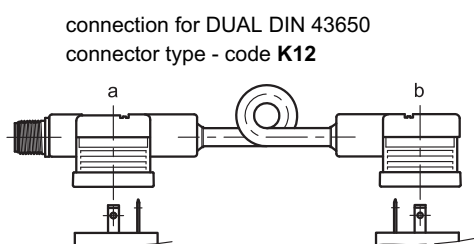


CONNECTOR M12x1 CONNECTION SCHEME






## 9 - OVERALL AND MOUNTING DIMENSIONS

DSE3-A\*  
DSE3-C\*

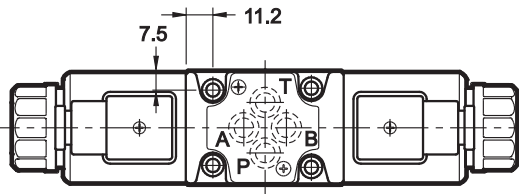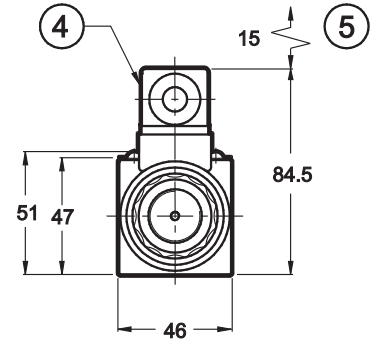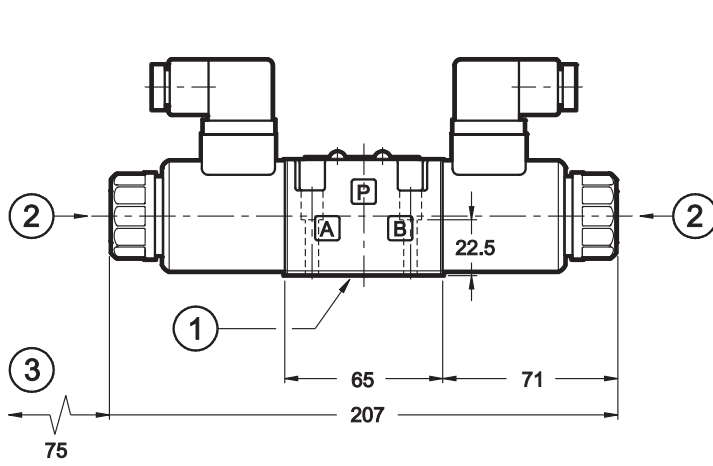

DSE3-A\*SA  
DSE3-C\*SA

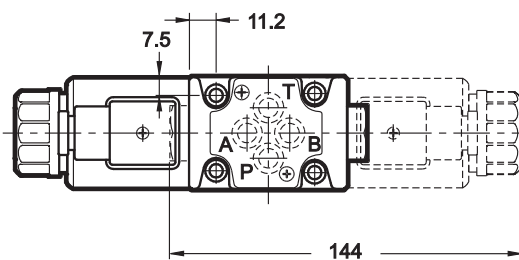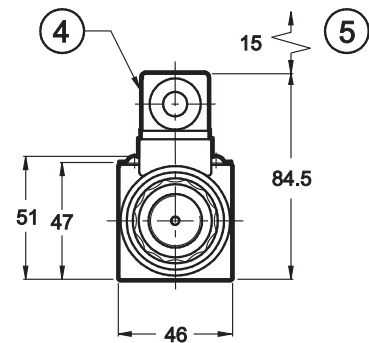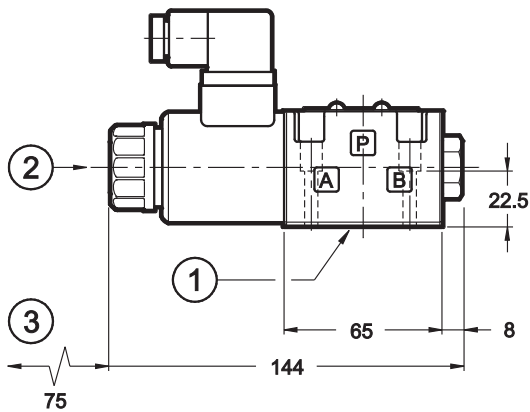

A\*SB and C\*SB versions solenoid position

dimensions in mm

1	Mounting surface with sealing rings: 4 OR type 2037 - 90 shore (9.25 x 1.78)
2	Standard manual override integrated in the solenoid tube (included in the supply) see par. 9
3	Coil removal space
4	DIN 43650 electric coil connector
5	Connector removal space


Fastening bolts: 4 bolts M5x30  
Torque: 5 Nm

## 10 - MANUAL OVERRIDE

The standard valve has solenoids whose pin for the manual operation is integrated in the tube. The operation of this control must be executed with a suitable tool, minding not to damage the sliding surface.

Two different manual override version are available upon request:

- **CM** version, manual override belt protected.
- **CS** version, with metal ring nut provided with a M4 screw and a blocking locknut to allow the continuous mechanical operations.
- **CH** version, lever manual override.

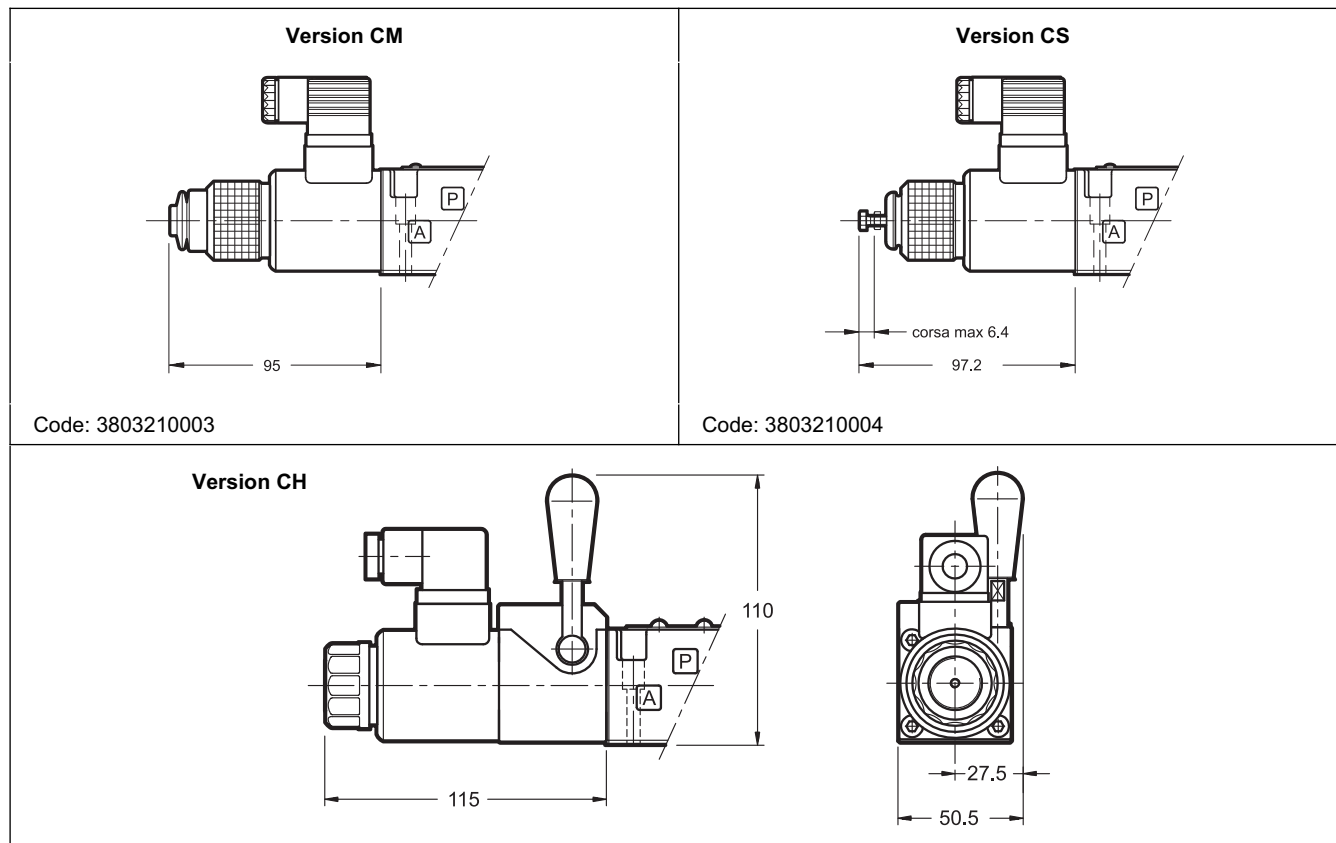

Code: 3803210003

Code: 3803210004

## 11 - ELECTRONIC CONTROL UNITS

### DSE3 - \*\* SA (SB)

<b>EDC-112</b>	for solenoid 24V DC	plug version	see cat.89 120
<b>EDC-142</b>	for solenoid 12V DC		
<b>EDM-M112</b>	for solenoid 24V DC	DIN EN 50022 rail mounting	see cat. 89 250
<b>EDM-M142</b>	for solenoid 12V DC		
<b>UEIK-11</b>	for solenoid 24V DC	Eurocard type	see cat. 89 300

## 12 - SUBPLATES (see catalogue 51 000)

Type PMMD-AI3G ports on rear
Type PMMD-AL3G side ports

### DSE3 - A\*      DSE3 - C\*

<b>EDM-M212</b>	24V DC solenoids	rail mounting DIN EN 50022	see cat. 89 250
<b>EDM-M242</b>	12V DC solenoids		
<b>UEIK-21</b>	24V DC solenoids	Eurocard format	see cat. 89 320



**DIPLOMATICA OLEODINAMICA S.p.A.**  
 20015 PARABIAGO (MI) • Via M. Re Depaolini 24  
 Tel. +39 0331.895.111  
 Fax +39 0331.895.339  
 www.diplomatic.com • e-mail: sales.exp@diplomatic.com